

FIGURE 1

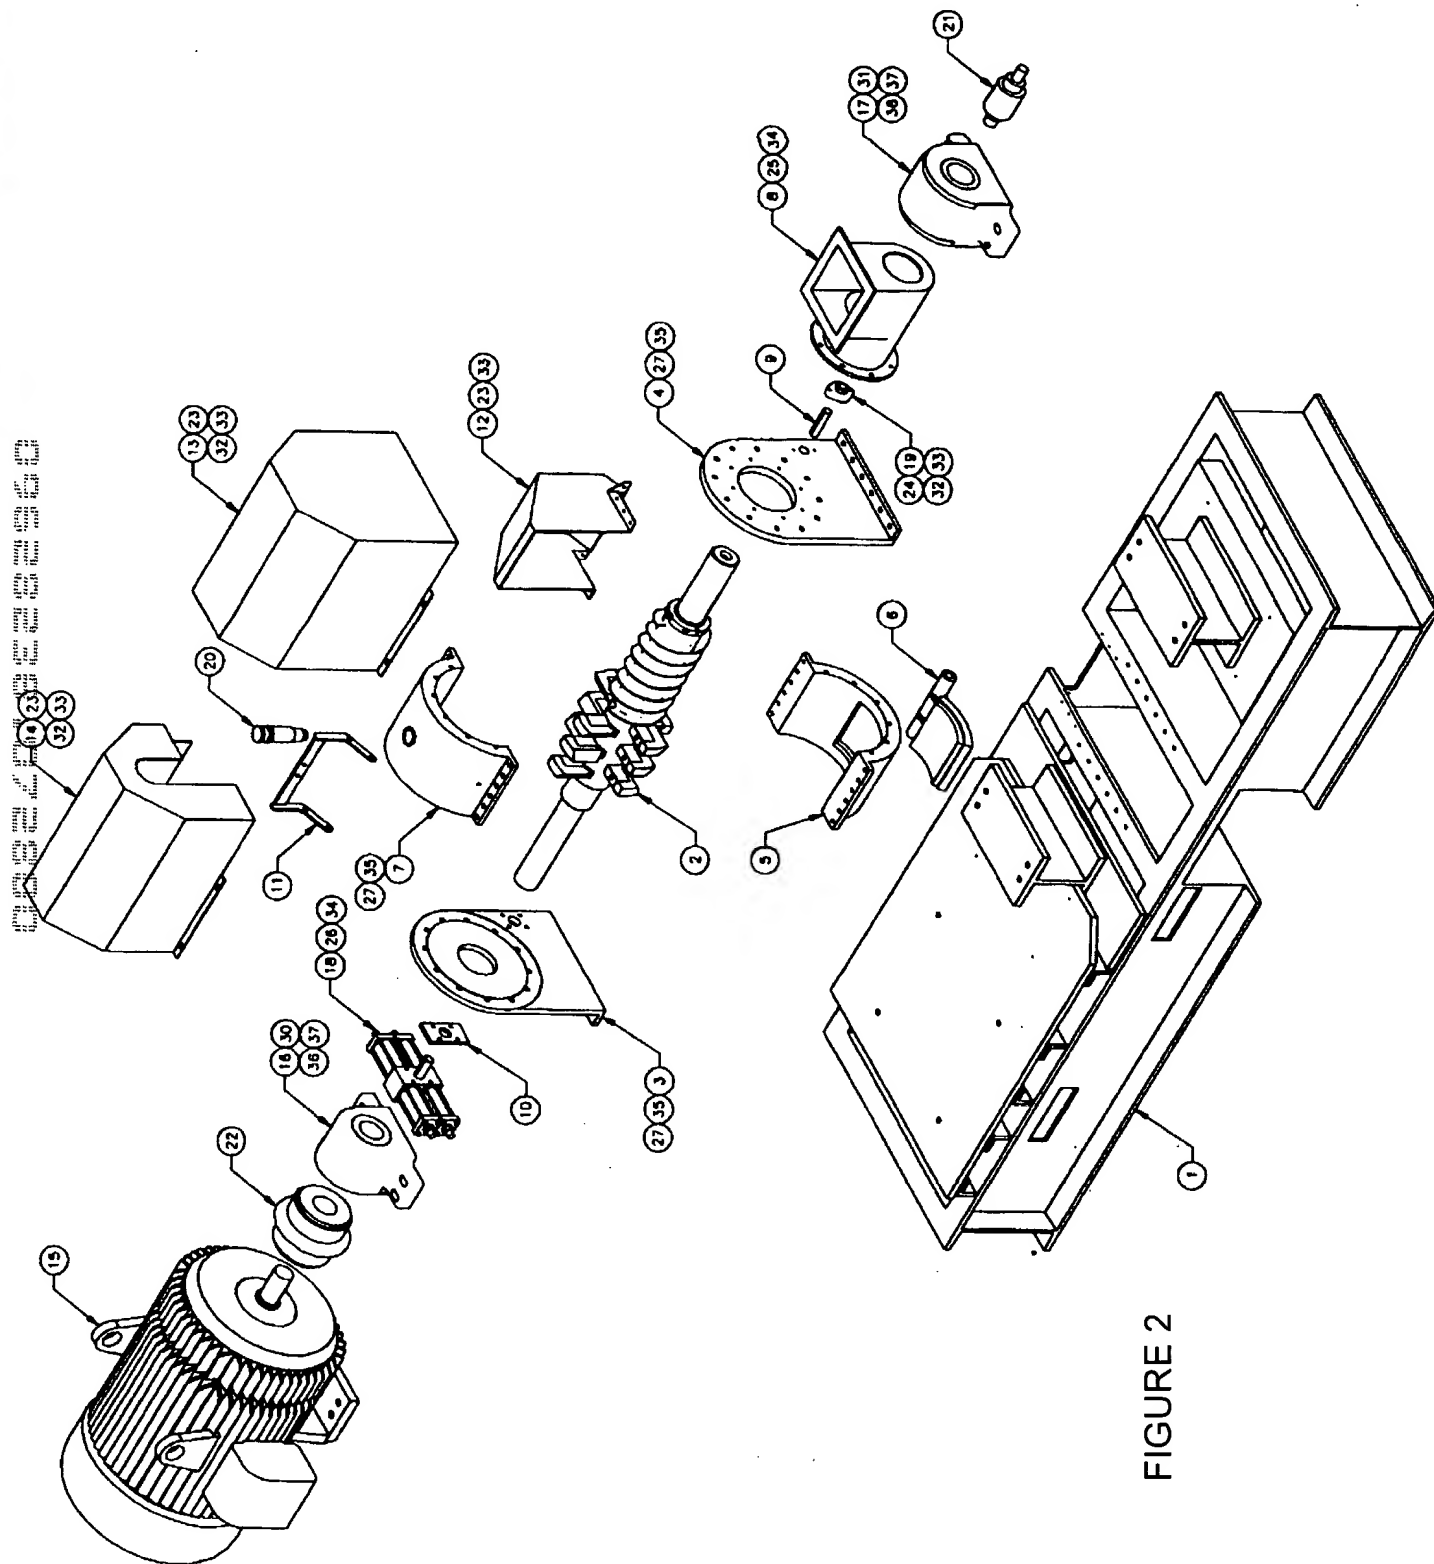

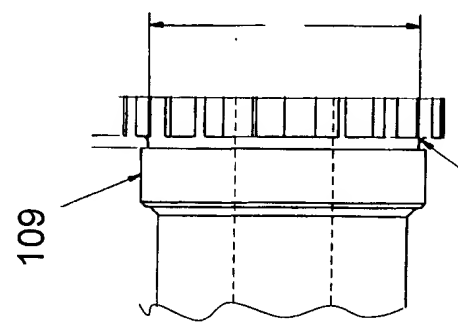
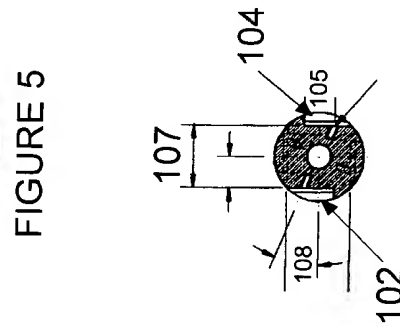


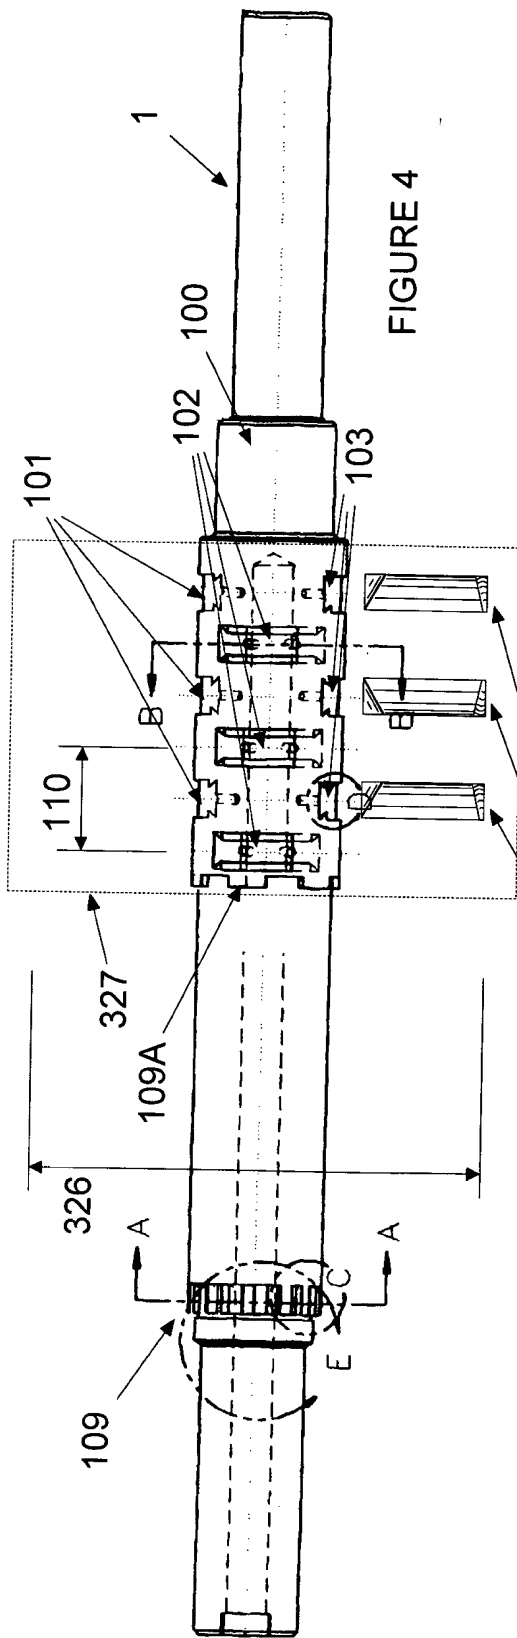


FIGURE 2





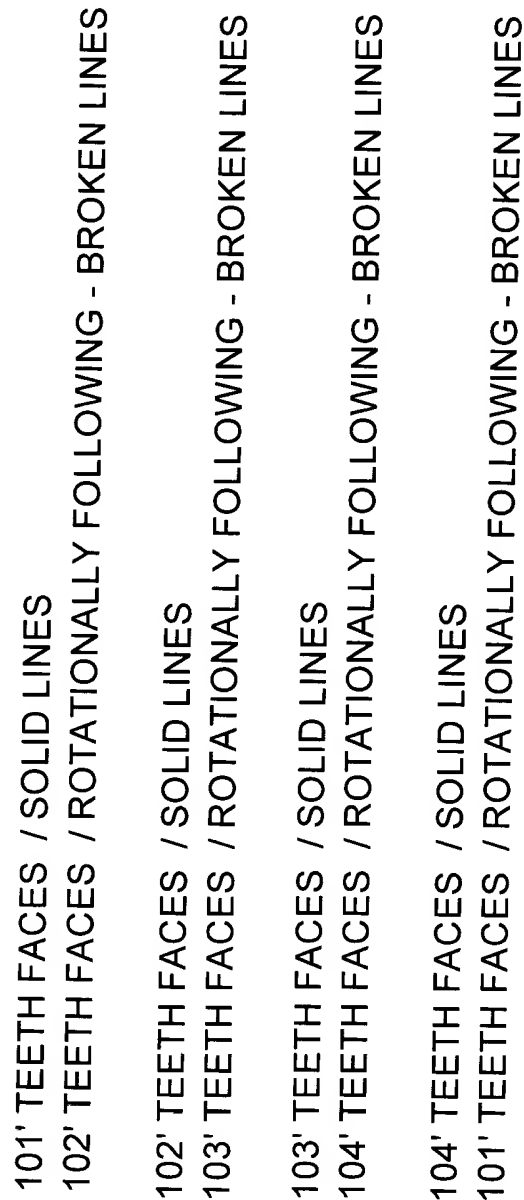


FIGURE 10



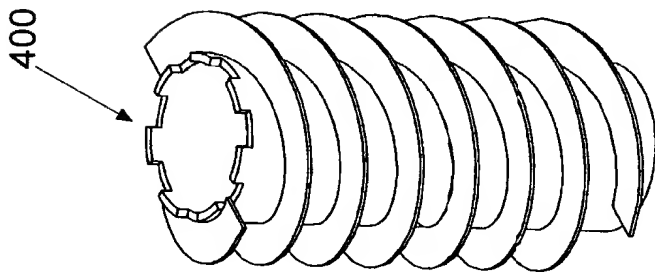


FIGURE 18

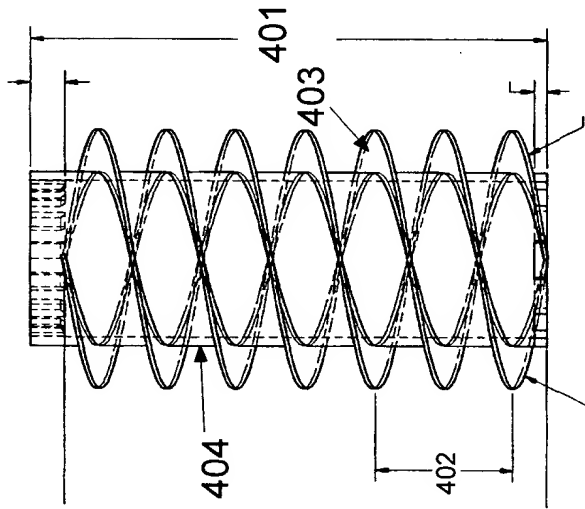


FIGURE 19

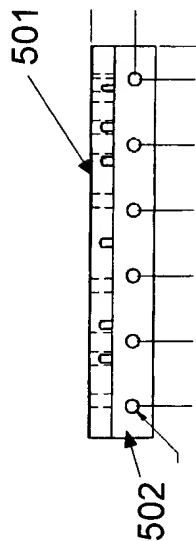


FIGURE 22

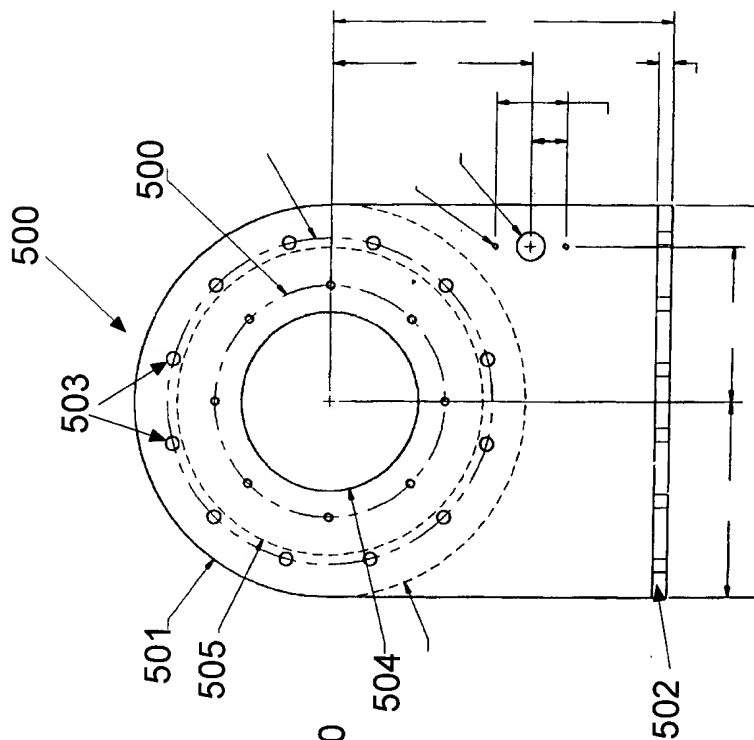


FIGURE 20

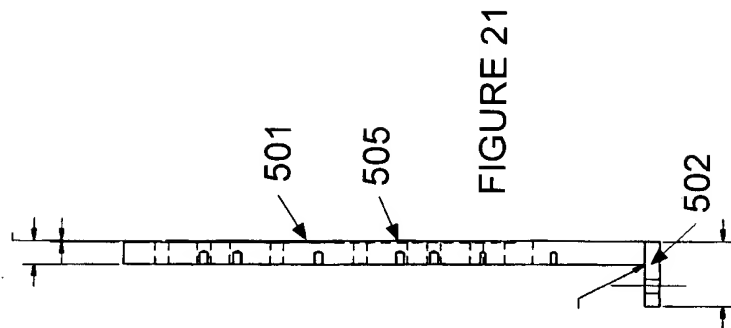
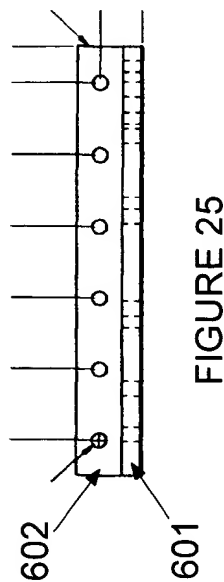
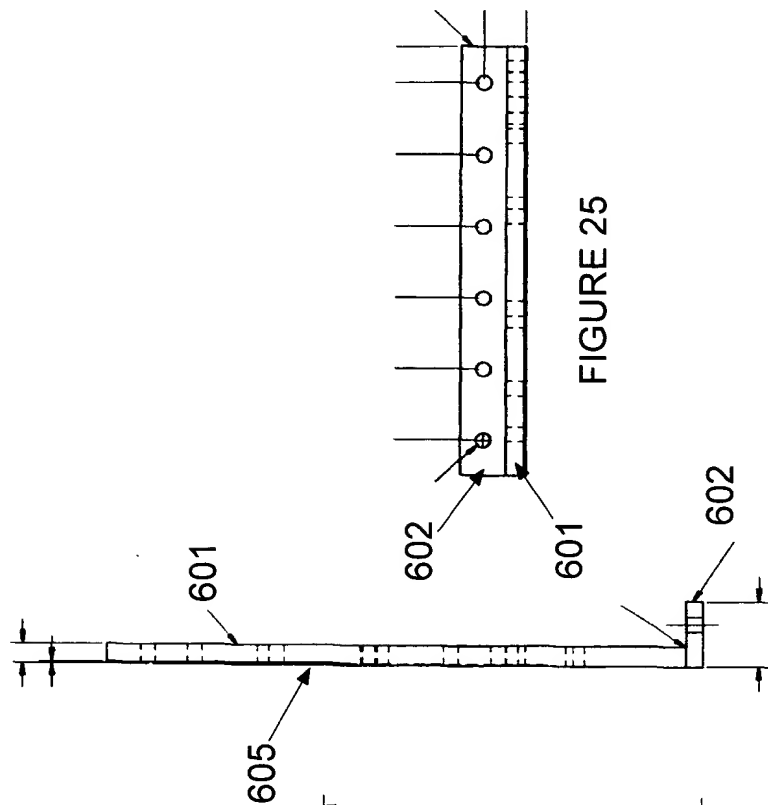
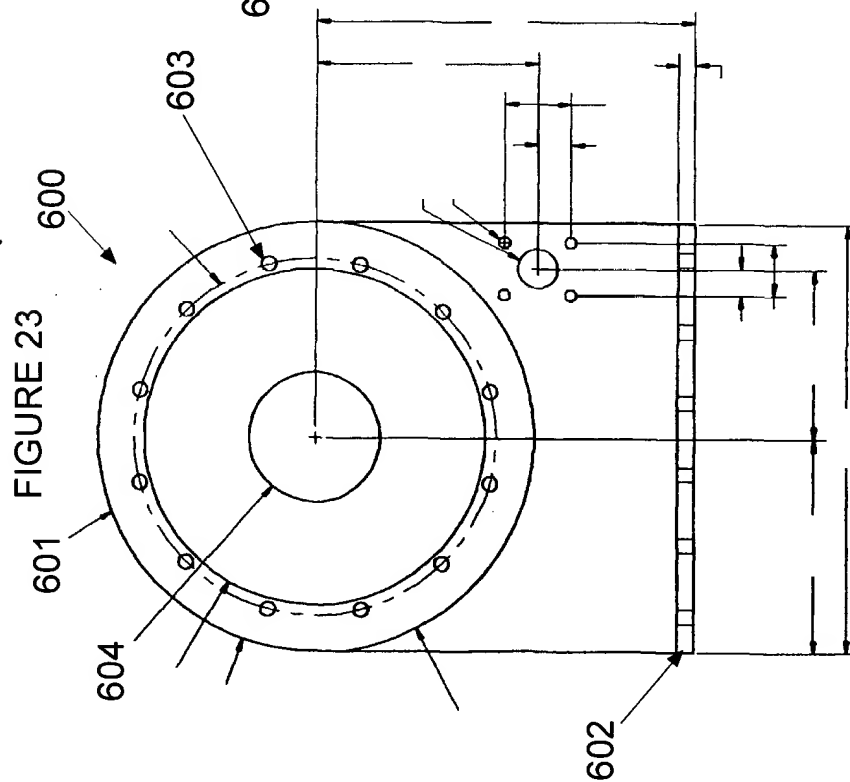


FIGURE 21





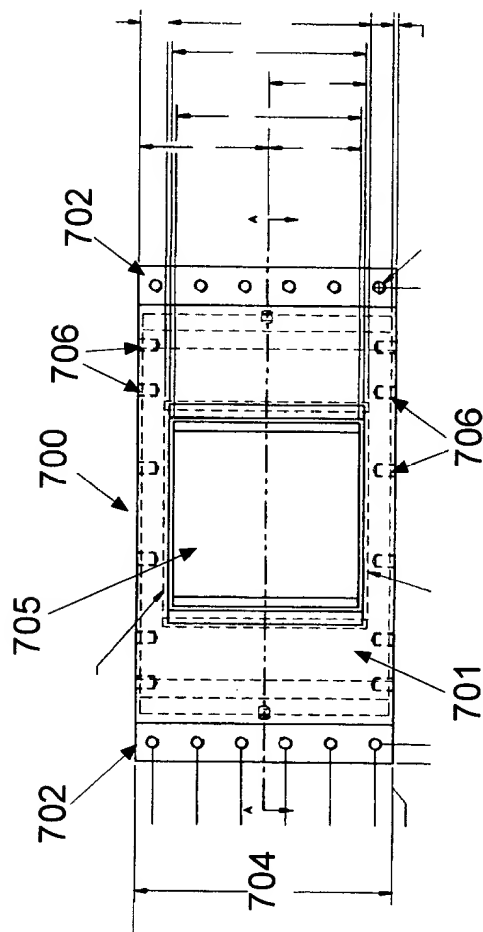


FIGURE 26

FIGURE 28

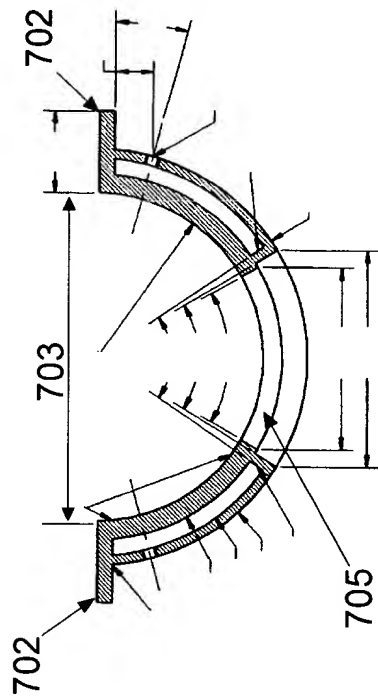
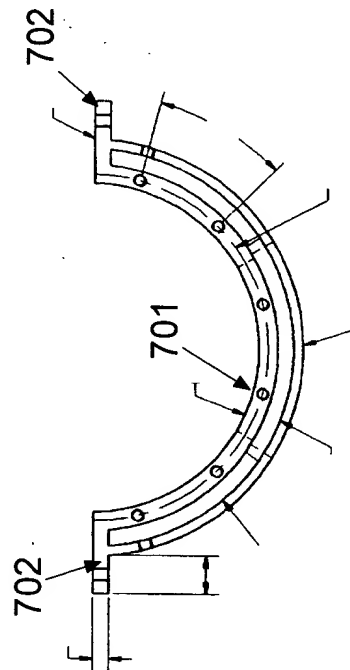


FIGURE 27



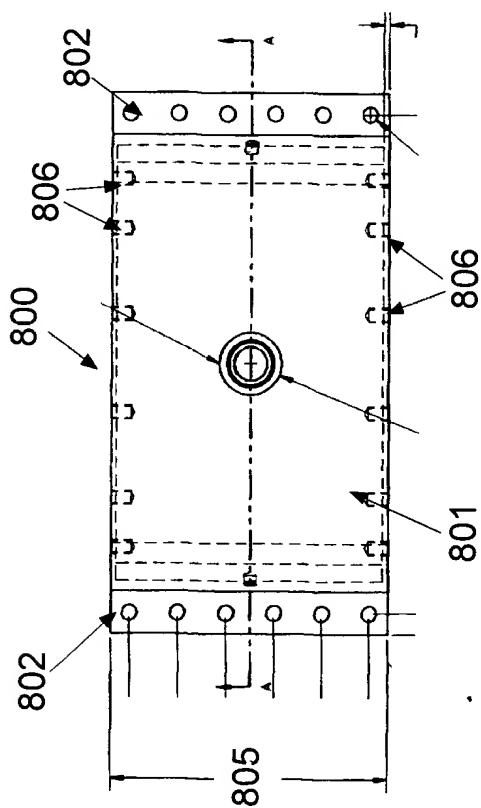


FIGURE 29

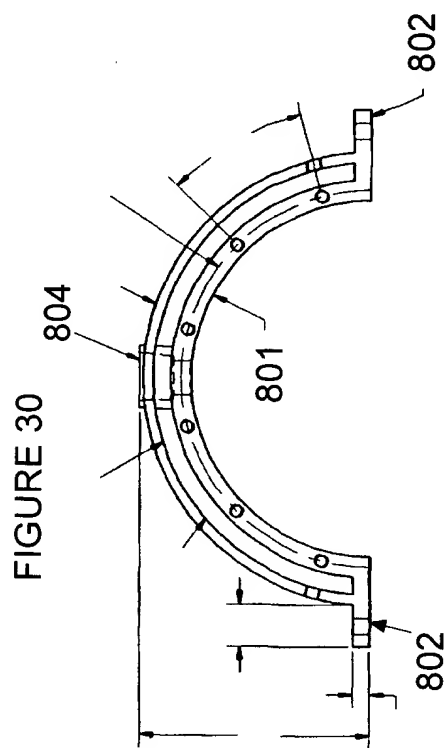


FIGURE 30

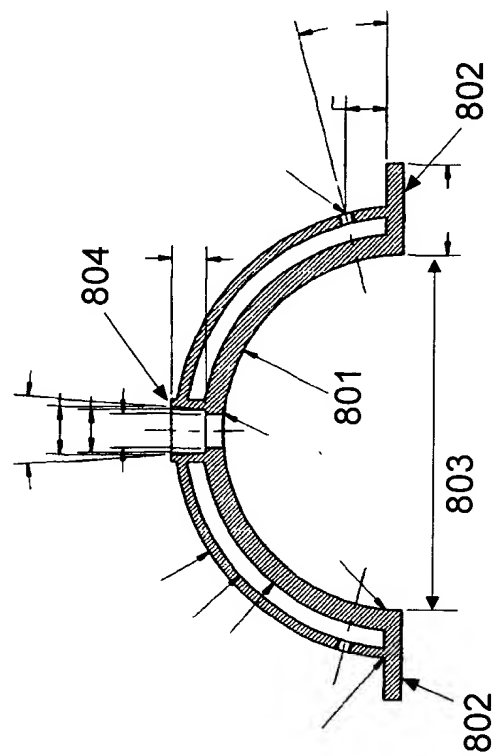


FIGURE 31

FIG. 32 is a perspective view of a curved support structure 900, which is adapted to support a curved member 902. The curved support structure 900 includes a plurality of curved ribs 901, which are spaced apart and extend from a base 902. The curved member 902 is shown in a curved position, supported by the curved ribs 901. The curved support structure 900 is adapted to be mounted to a wall or other surface, and the curved member 902 is adapted to be mounted to a curved surface, such as a curved wall or ceiling.

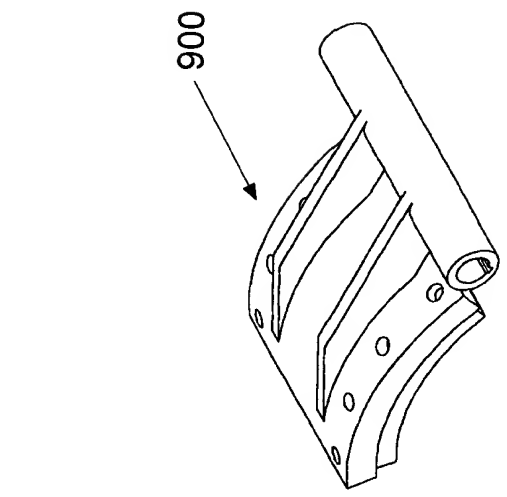


FIGURE 32

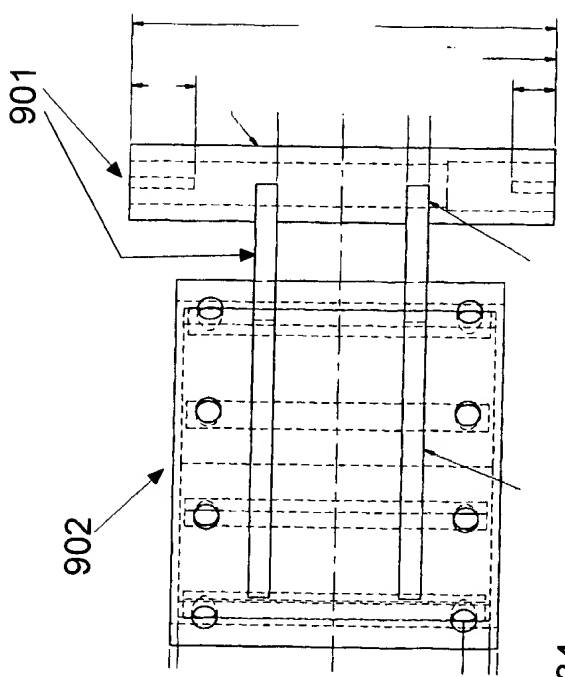


FIGURE 34

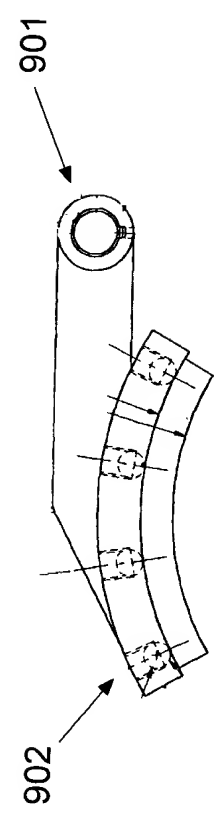


FIGURE 33